


S4A INDUSTRIAL CO.,LIMITED

Operation Instruction



- Installation with hidden screw hole, the appearance with the sense of science.
- With dry contact signal output, easy to link with various gated equipment.
- Instruction with light indicator.
- Power supply: 12-36V DC/AC

4 The definition of input and output

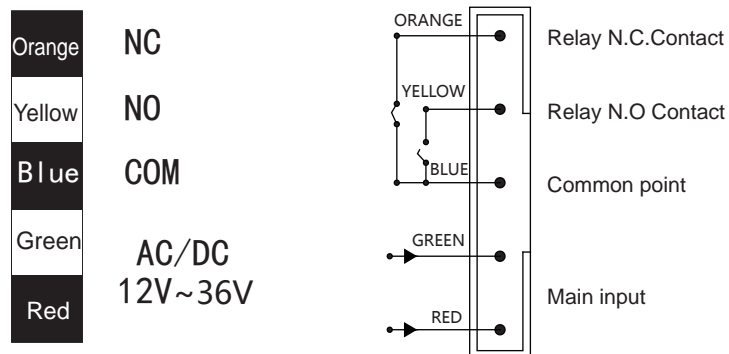

5 Fittings

- main sensor (one pcs)
- Retention screw (one bag)
- 5P Socket cable (one)
- Operating instructions (one)


6 The main technical parameters

Supply power:	AC/DC 12V~36V
Static parameter:	(DC12V) 22mA
Action current:	(DC12V) 55mA
Transmit distance:	1~15CM adjustable
Operation Frequency:	38KHZ
Working environment humidity:	-20°C~45°C
Dimension:	113mm (L) x 63mm (W) x 20mm (H)
Fixed way:	Fixed with hidden screw
Total Weight:	108G

1 Security Guide

Thank you so much for your purchasing. Please refer to the following before using.

2 The Over-all structure

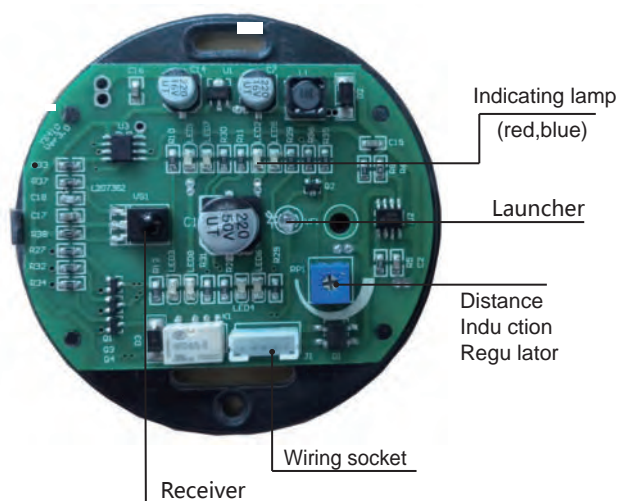

3 The overall features

- Adopt infrared modulation-demodulation, interference signal will not be caused.
- With the non-contact induction design, door can be opened in an easy and clean way.
- Transmit distance is adjustable from 1 to 15cm, can be set according to actual occasion.
- Low-power design with longer service life.
- Adopt high-sensitivity infrared tubes, quick response for door opening.



S4A Industrial Co., Limited

Address: The 2nd floor, Jinmin'an Industrial Zone, #529, Bulong Rd.
Bantian St. Longgang Dist. Shenzhen, PRC.. CN 518131



Tel: +86 755 29450011

www.s4a-access.com / Email: sales@s4a-access.com
Mob/Whatsapp/Wechat/Viber: +86 134 1050 0721